



**Your Single Source Solution**

# EZ-Pull® Line Sets

## APPLICATIONS

Ductless mini-split systems. VRF commercial systems. Split system (A/C & Heat Pump).

## SPECIAL FEATURES

- Meets ASTM E84 for smoke and fire (25/50)
- Superior tear resistance
- Rugged, anti-tear exterior allows for easier installation of the line set
- UV Resistant
- R410 A Approved
- Insulation is marked every foot
- Paintable

## TECHNICAL SPECIFICATIONS

**Copper Tubing:** Commercial Grade Refrigeration Tubing

**Copper:** No. C122200 DHP (Phosphorous deoxidized, high residual phosphorous)

**Low-density Polyethylene Foam:** Closed cells foam, CFC and HCFC gas free

**Insulation:** According to ASTM E96-00

**Working Temperature:** Meets/exceeds ASTM C 1427-07

**Surface Burning Characteristics:** UL 94HBT, UL 723, ASTM E84 (25/50), flame and spread index less than 25 and smoke development index less than 50 as tested according to UL 723.

**Wall Thickness:** 1/2" & 3/4"

**EZ-Pull - Insulation (White Hard Shell):**

Ductless: 1/4" - 1 1/8"

Plain End 1/4" - 1 1/8"

Insulated Copper Tube: 1/4" - 1 1/8"


Lengths: 10' - 100' and 164' coils

## INSULATION R VALUES

1/2" Wall - R3.3

3/4" Wall - R5.2

\*R - Value calculation using a K-Factor of 0.25 BTU-in/hr-ft (2)-F @ 75°F, 24°C mean temp.

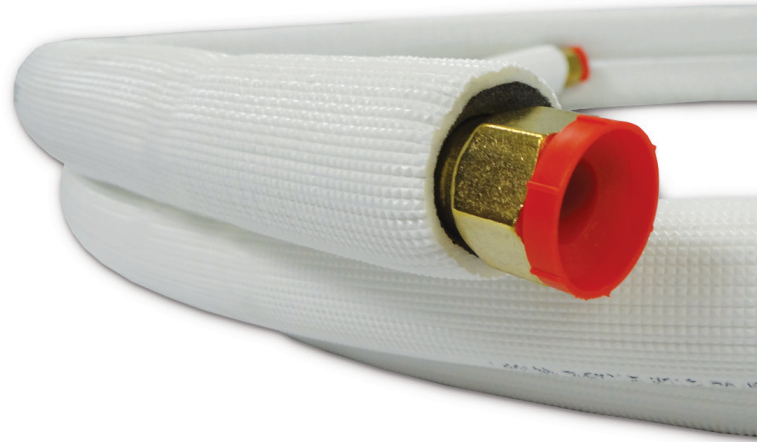

EZ-PULL line sets can be ordered with Flare Nuts (above) or Plain End (below)



**JMF OFFERS MORE LINE SET PRODUCT OPTIONS THAN ANYONE IN THE INDUSTRY.**

*JMF COMPANY IS YOUR CONSOLIDATING SOURCE FOR* copper tubing, line sets, copper fittings, push to fit, pex, ball valves, gas valves, plumbing valves, malleable fittings, steel nipples, plastic fittings, brass threaded, brass nipples, flare & compression, gas connectors, water connectors, appliance kits, cord sets and MORE.

